


# Schaltplan

## Kühl- / Tiefkühl-Kombinationsschrank **CD 140**

[Art. 435800140]



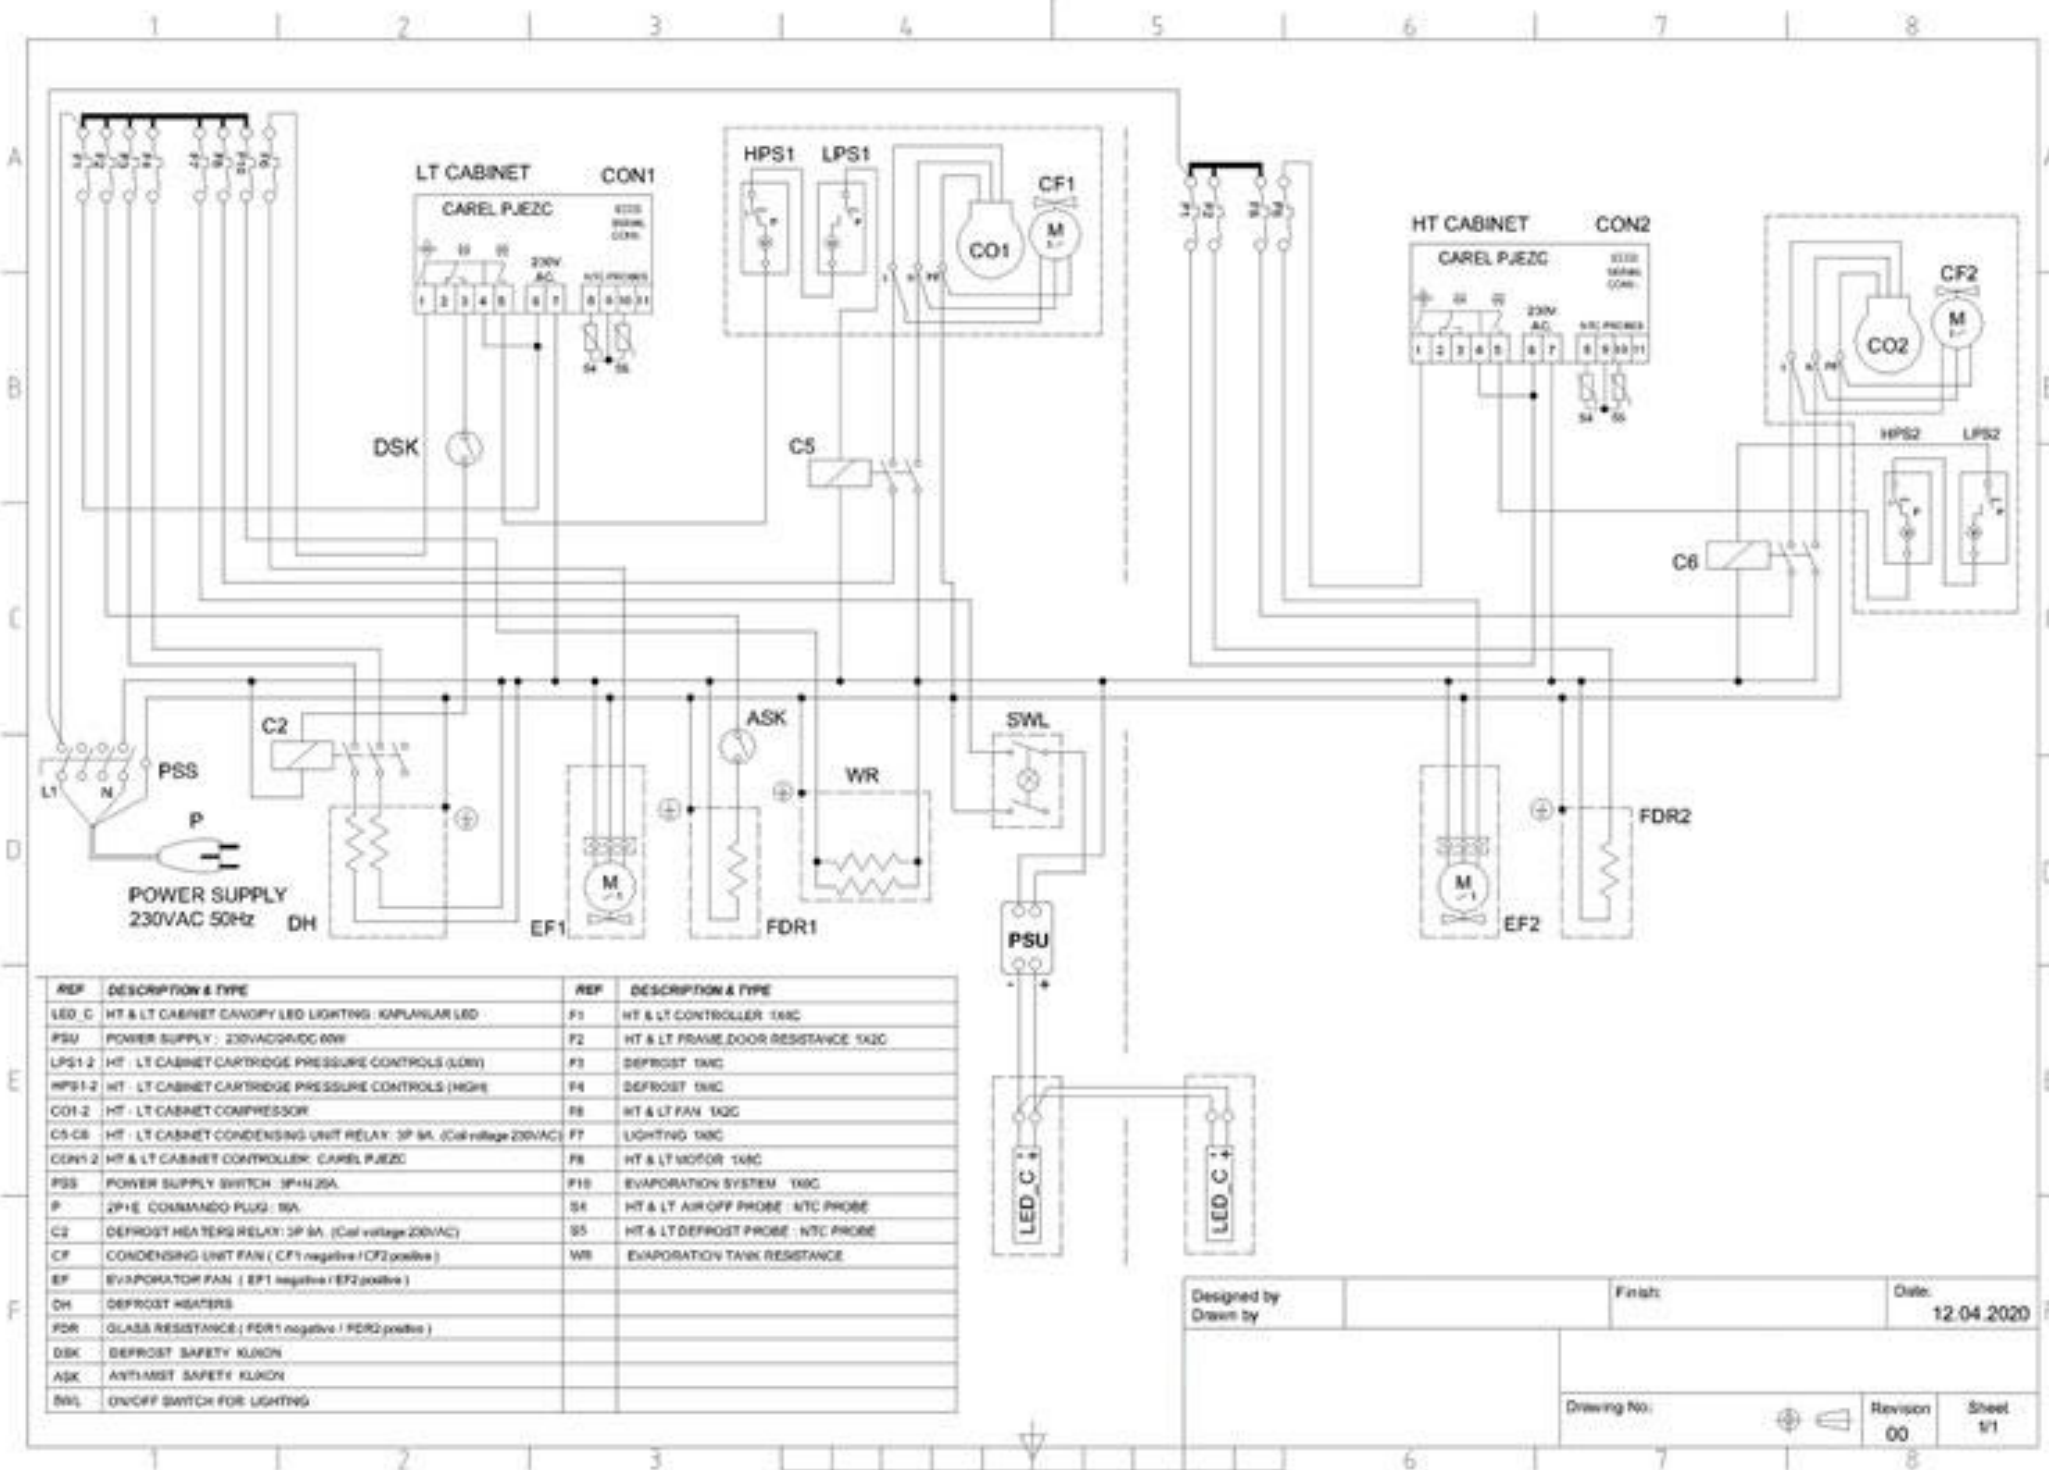

REF	DESCRIPTION & TYPE	REF	DESCRIPTION & TYPE
LED_C	HT & LT CABINET CAVITY LED LIGHTING: KAPLANKAR LED	F1	HT & LT CONTROLLER 1x1C
PSU	POWER SUPPLY - 230VAC/50HZ 50W	F2	HT & LT FRAME DOOR RESISTANCE 1x1C
LPS1-2	HT - LT CABINET CARTRIDGE PRESSURE CONTROLS (LOW)	F3	DEFROST 1x1C
HPS1-2	HT - LT CABINET CARTRIDGE PRESSURE CONTROLS (HIGH)	F4	DEFROST 1x1C
CO1-2	HT - LT CABINET COMPRESSOR	F6	HT & LT FAN 1x1C
C5-C6	HT - LT CABINET CONDENSING UNIT RELAY: 3P 5A (Call voltage 230VAC)	F7	LIGHTING 1x1C
CON1-2	HT & LT CABINET CONTROLLER: CAREL PJEZC	F8	HT & LT MOTOR 1x1C
PSS	POWER SUPPLY SWITCH: 3P+N,25A	F10	EVAPORATION SYSTEM 1x1C
P	2P+E COMMANDO PLUG: 5A	S4	HT & LT AIR OFF PROBE - NTC PROBE
C2	DEFROST HEATER RELAY: 3P 5A (Call voltage 230VAC)	S5	HT & LT DEFROST PROBE - NTC PROBE
CF	CONDENSING UNIT FAN ( CF1 negative / CF2 positive )	WR	EVAPORATION TANK RESISTANCE
EF	EVAPORATOR FAN ( EF1 negative / EF2 positive )		
DH	DEFROST HEATERS		
FDR	GLASS RESISTANCE ( FDR1 negative / FDR2 positive )		
DSK	DEFROST SAFETY KILNCH		
ASK	ANTI-MIST SAFETY KILNCH		
SWL	ON/OFF SWITCH FOR LIGHTING		

Designed by	Finish	Date:
		12.04.2020
Drawing No.		Revision
		00
		Sheet
		1/1

NordCap GmbH & Co. KG

Thalendorststraße 15  
D-28307 Bremen

Telefon: +49 421 48557-0  
Telefax: +49 421 488650

E-Mail: [info@nordcap.de](mailto:info@nordcap.de)

The logo features the text "NordCap" in a bold, black, sans-serif font. A registered trademark symbol (®) is positioned to the upper right of the text. To the right of the text is a stylized graphic element consisting of a black diagonal line that starts from the bottom right and extends upwards and to the left, ending in a sharp point.

**NordCap<sup>®</sup>**

**PROFESSIONELL KÜHLEN**